

**PRODUCT OVERVIEW**

Clutches and Brakes >



**HYDRAULICALLY AND PNEUMATICALLY OPERATED CLUTCHES AND BRAKES**



## YOUR DRIVES ARE SAFE WITH US >





The GKN Stromag has for decades been a highly regarded partner in the area of mechanical drive engineering. Attractive, tailor-made and cost-effective solutions combined with products of a high standard of quality guarantee optimum customer benefits.




We specialise in wet and dry running clutches/brakes, solutions for torsional vibrations in the drive train and a service conception tailored to suit the individual requirements of our customers.

GKN Stromag France is leader in the area of industrial disc brakes, in particular for the wind turbine market. GKN Stromag clutches and flexible couplings, spring-applied brakes, discs and limit switches have a leading position on the world market.



Clear strategic focus on core technologies in production and core applications enable short construction and delivery times. Exceptional engineering know-how is a further outstanding strength as a basis for solid customer partnerships.

GKN Stromag products are innovatively tailored to meet specific market requirements and feature in virtually all mechanical drives. Drive solutions specially tailored to our customers' needs optimise processes and minimise operating costs.



**SOLUTIONS FOR YOUR APPLICATION >**

Hydraulically or pneumatically operated clutches and brakes are highly advanced and reliable components for modern energy-efficient drives. These units control individual drive trains on modern agricultural machines such as combine harvesters and forage harvesters, as well as the power flow in various hybrid drives.



In conjunction with flexible Stromag couplings, drives subject to impact or shock loads such as road millers or stone crushers are comfortably controlled.



Hydraulically or pneumatically operated brakes in drives ensure stability of construction machinery and keep rotary drives in the required position. Winches, on cranes or ships are also braked and held under difficult conditions.



High torques and small dimensions are two significant characteristics of hydraulically operated clutches and brakes. By selecting suitable friction linings and influencing pressure build-up, the operating characteristics can be adapted to meet specific requirements.




This brochure contains several clutch and brake series on the basis of which we can develop solutions tailored to your particular application.



**GKN STROMAG KMK >**


Universal, hydraulically operated multi-disc clutch. Suitable for wet or dry operation.  
 Various friction linings with different properties are available.  
 Transmittable torques from 200 Nm to 140,000 Nm.  
 Other sizes and customer-specific adaptations available on request.  
 Pneumatic option also available.

**> INSTALLATION IN GEARBOX (WET OPERATION)**

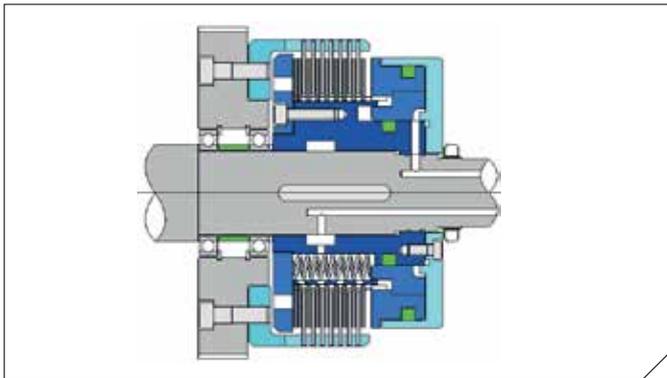


**GKN Stromag KMK** for use in gearboxes (wet operation) with optional disc oil flushing. Hydraulic and cooling oil supplied via the transmission shaft.


**> MOUNTING ON GEARBOX (DRY OPERATION)**

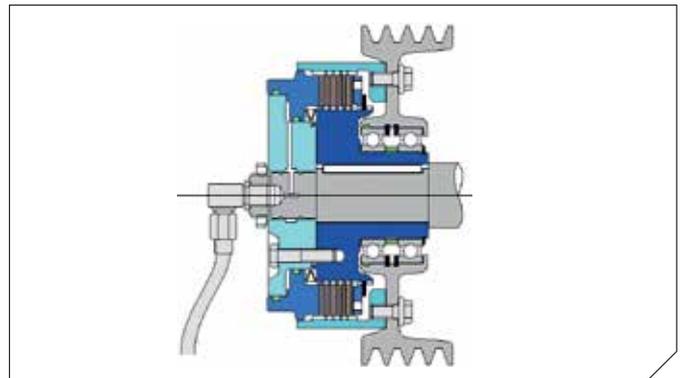

**GKN Stromag KMK** as a shaft-pulley connection for use outside gearboxes (dry operation). Hydraulic oil can be supplied axially through the shaft. Available as a completely assembled and bearing supported unit.

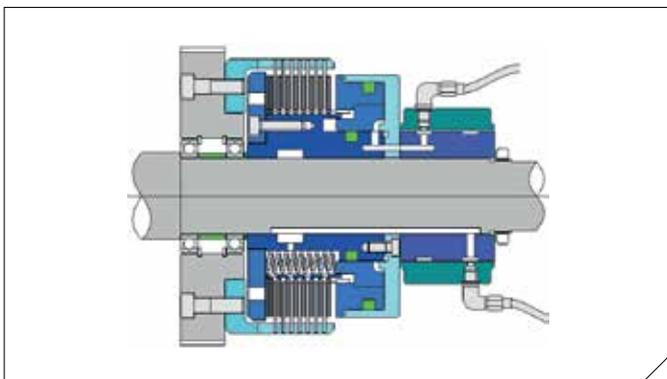

**GKN Stromag KMK** for use in gearboxes (wet operation) with optional disc oil flushing. Hydraulic and cooling oil supplied via integrated radial oil supply (KRE). No bores in the transmission shaft.

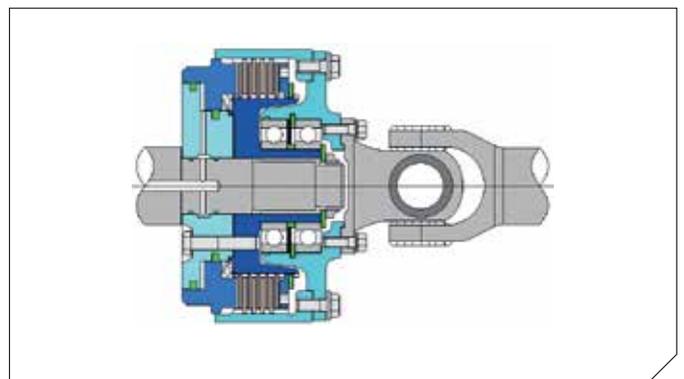


**GKN Stromag KMK** as a shaft-cardan shaft connection for use outside gearboxes (dry operation). Hydraulic oil supplied axially through the shaft. Available as a completely assembled and bearing supported unit.

**GKN STROMAG KUK >**


Hydraulic multi-disc clutch with hammer head discs. Designed specially for dry operation on drives subject to torsional vibrations. Transmittable torques from 1,600 Nm to 6,000 Nm. Other sizes and customer specific adaptations available on request. Pneumatic option also available.

**GKN STROMAG KHM >**


Hydraulic clutches with low or backlash-free torque transmission via diaphragms. Minimal residual torque when open. Suitable for direct use on internal combustion engines. Transmittable torques from 600 Nm to 5,000 Nm. Other sizes and customer-specific adaptations available on request. Pneumatic option also available.

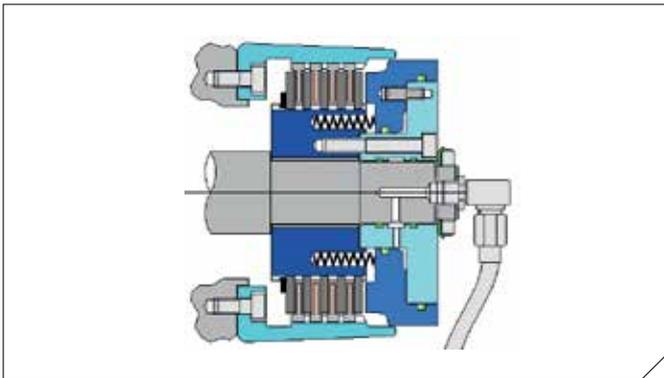


**GKN Stromag KUK** as a basic type. For use outside gearboxes (dry operation). Hydraulic oil supplied axially through the shaft. Customer-specific adaptations of shaft and external body connections possible.

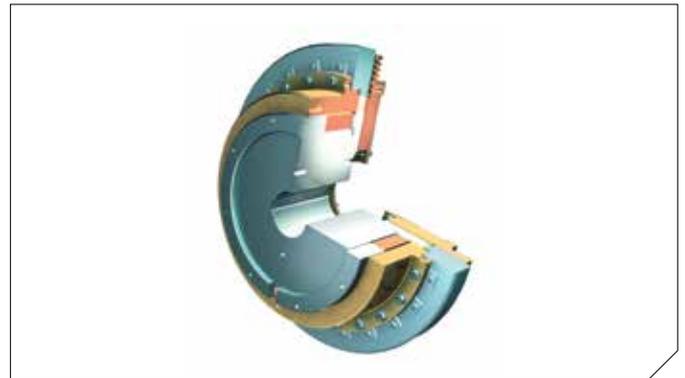

**GKN Stromag KHM** as a shaft-pulley connection. Backlash-free power transmission on pulley side through external body and piston with diaphragm guidance. Friction lining carrier on shaft side with low wearing, wide sliding gear.

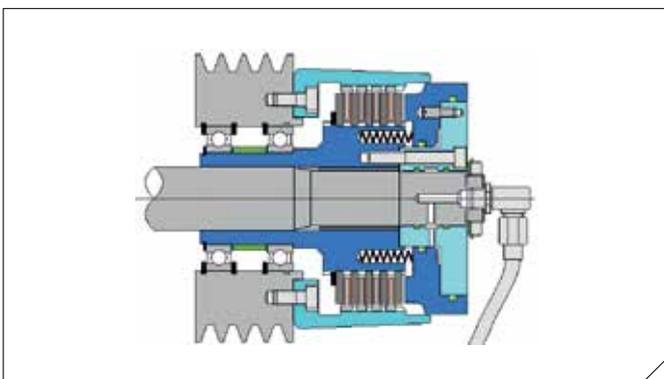


**GKN Stromag KUK** as a shaft-pulley connection for use outside gearboxes (dry operation). Hydraulic oil supplied axially through the shaft. Available as a completely assembled and bearing supported unit.

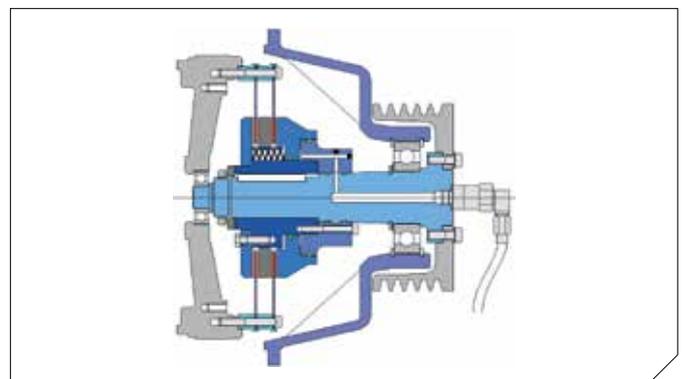


**GKN Stromag KHM** for engine mounting. Backlash-free power transmission via diaphragm guided pistons and friction linings. Drag torque free when open. Connection for SAE flywheels. Housings for SAE sizes 1 to 4 possible.

**GKN STROMAG KHA >**

Dry, hydraulically operated multi-disc clutches in housings with SAE connection sizes for mounting on diesel engines. Reinforced inner discs and outer discs with hammer head for low gear wear. Transmittable torques from 500 Nm to 5,000 Nm. Other sizes and customer-specific adaptations available on request. Pneumatic option also available.

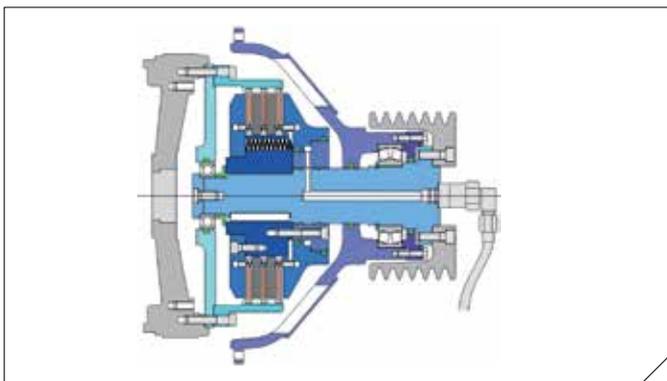


**GKN Stromag KHA** with additional carrier for heavy-duty pilot bearing and bracing springs for reducing drag torque. Connection for standard flywheels. Housings for SAE sizes 1 to 4 possible.

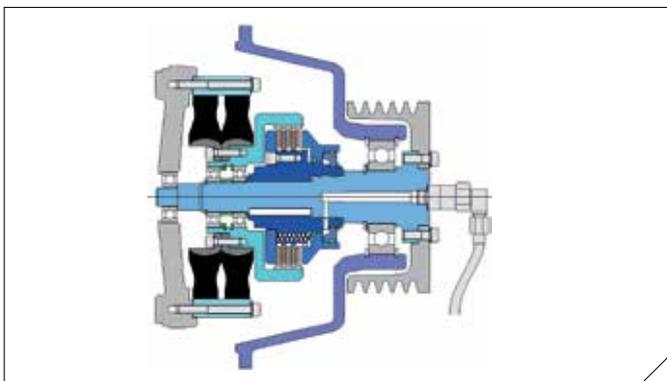


**GKN Stromag KHA** with flexible PVN couplings for drives particularly subject to torsional vibrations. Connection for SAE flywheels. Housings for SAE sizes 1 to 4 possible.

**GKN STROMAG KHR >**

Hydraulically operated multi-disc clutches with rotating piston. For use mainly outside gearboxes (dry operation) when no axial oil supply is possible. Transmittable torques from 200 Nm to 12,000 Nm. Other sizes and customer-specific adaptations available on request. Pneumatic option also available.

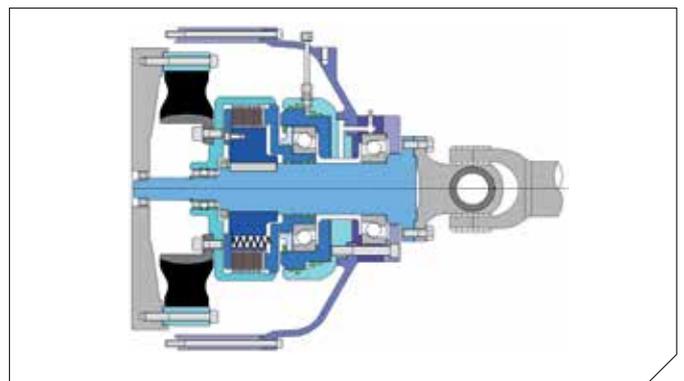

**GKN Stromag KHR** as a „Two in One“ combination“ in SAE housing on diesel engine with direct flange-mounted cardan shaft.

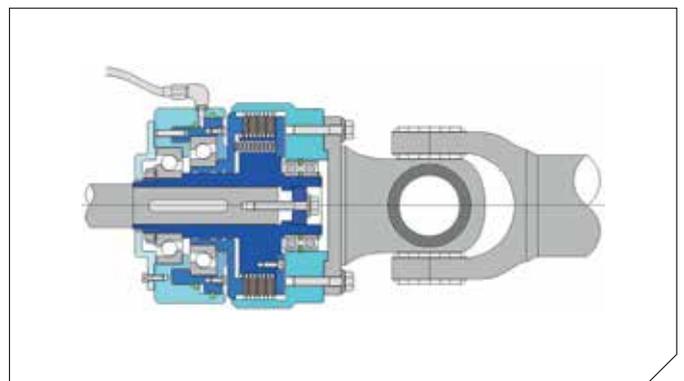


**GKN Stromag KHR** as a complete unit for preassembly with supported external body as a shaft-shaft connection.

**GKN STROMAG KMB >**


Universal hydraulically released, spring-applied multidisc brake. For use in or outside gearboxes (wet or dry operation) as well as a holding brake with emergency stop function. Various friction linings with different properties are available. Transmittable torques from 100 Nm to 130,000 Nm. Other sizes and customerspecific adaptations available on request. Pneumatic option also available.

**GKN STROMAG KMB.ZM >**


Hydraulically released, spring-applied multi-disc brake in own housing with standard flange connections for mounting between gearbox and hydraulic motors. Flange types and shaft connections according to customer requirements. Transmittable torques from 270 Nm to 2,000 Nm. Other sizes and customerspecific adaptations available on request. Pneumatic option also available.

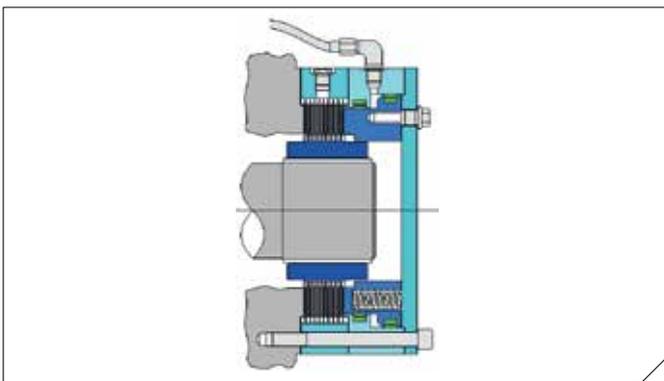


**GKN Stromag KMB** standard type for direct mounting on shaft end on gearbox or motor. Alternatively with or without sealed shaft bushing.

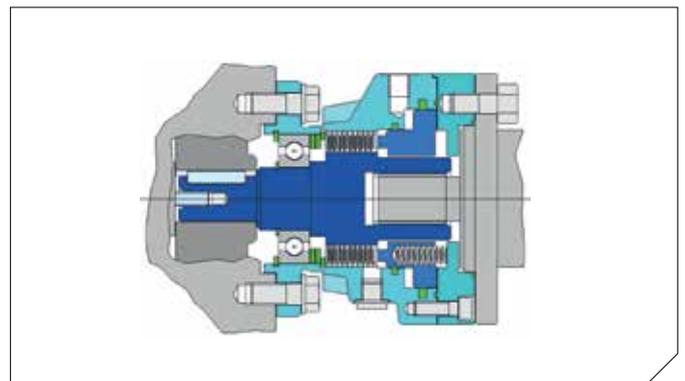

**GKN Stromag KMB.ZM** mounted between gearbox and hydraulic motor.

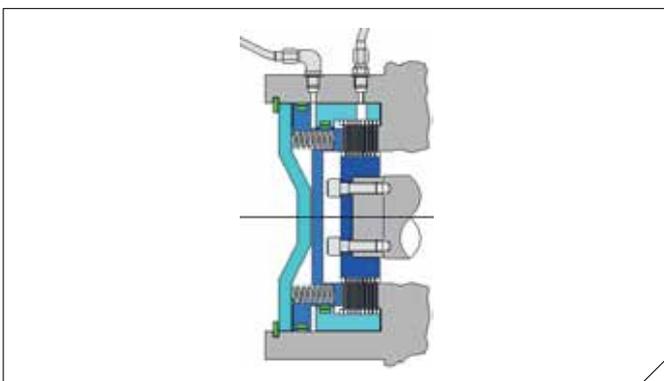

**GKN Stromag KMB** adapted customer-specific requirements. Integrated in a gearbox.

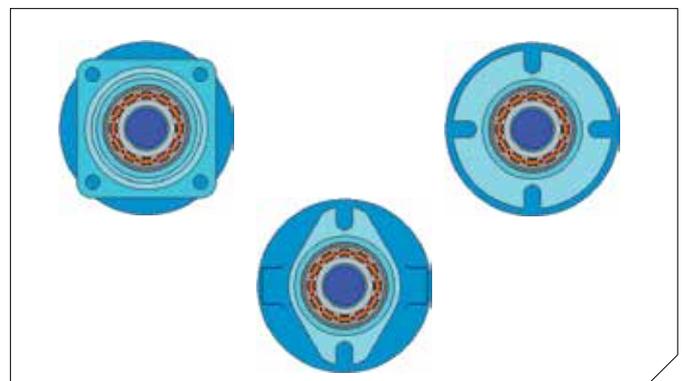


Connection flanges according to SAE standard or customer specifications.

**GKN Land Systems® 2014**

PO Box 55,  
Ipsley House,  
Ipsley Church Lane,  
Redditch,  
Worcestershire B98 0TL  
P: +44 (0)1527 517 715

## INTEGRATED POWERTRAIN COMPONENTS, SYSTEMS AND SOLUTIONS

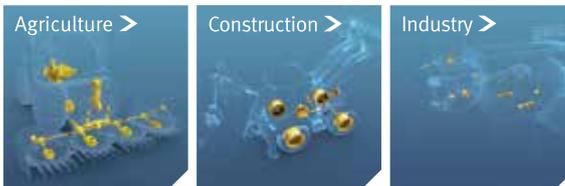

### FROM POWER SOURCE >



### > TO POWER APPLIED

**Stromag**  
— safety in motion —

**GKN Stromag AG**  
Hansastraße 120  
59425 Unna  
P: +49 2303 102-0  
F: +49 2303 102-201  
[www.gknlandsystems.com](http://www.gknlandsystems.com)  
[info.stromag@gkn.com](mailto:info.stromag@gkn.com)

The GKN Stromag AG  
is a company of GKN Land Systems

Find out more about GKN Stromag  
global trade representatives

